




Product Description

3M FASARA Whiteboard Film WH-111-G, the “Product”, is a unique glass film with a writable and erasable surface that can be used to convert interior glass surfaces into creative, collaborative environments. The Product has a pressure-sensitive adhesive that allows installation on virtually any glass surface.

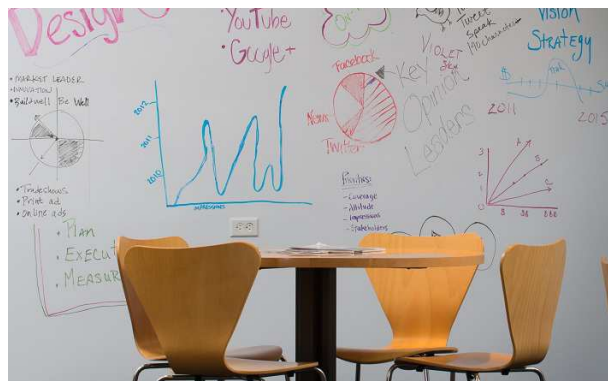

Featured Benefits

- Superior anti-ghosting performance
- Flexible, durable polyester
- Suitable for use in offices, schools, healthcare and other interior environments
- Can be installed on interior glass and many smooth surfaces. For application on other interior surfaces, use 3M™ DI-NOC™ Whiteboard Film WH-111.
- Meets U.S. building regulations for flammability resistance
- Abrasion, stain and chemical resistant
- Compatible with most standard dry erase markers and erasers
- Expected Performance Life is 5 years for vertical, indoor applications on non-perimeter glass.

Product Characteristics

The values in this table are typical, and are based on test data deemed reliable but are not warranted.

Characteristic		Value
Material	Film	Polyester
	Adhesive	Pressure-sensitive acrylic, permanent
	Release Liner	Silicone-coated polyester
Thickness	Film + Adhesive	5.9 mils (150 microns) not including release liner
	Release Liner	1 mil (25 microns)
Roll Size		49.2 in. x 98 ft. (1250mm x 30 m)
Weight		28 lb. (12.4 kg) (approx.) for a 30 m roll

Product Performance

The values in these tables are typical, and are based on test data deemed reliable but are not warranted.

Characteristic	Results
Adhesion 24 hours after application*	Glass: 1.6 lb/in. (7N / 25mm)
Abrasion Resistance	Abraded 10 strokes with steel wool under a load of 0.5kg No noticeable scratches
Fire Resistance	When used in Interior Applications, the Product has the National Fire Protection Association Class A rating (as defined in NFPA 101 "Life Safety Code" Test Method ASTM E84).

* Test specimens were applied to the substrate and conditioned at 68 F (20 C), then peel tested at 180 degree at a tensile speed of 12 inches (300 mm) per minute.

Stain Resistance

Characteristic	Evaluation	Results
Stain and Chemical Resistance	Direct contact for 18 hours with the following substances:	No permanent staining
	<ul style="list-style-type: none"> • Salt water (5%) • Household Ammonia • Soapy Water (1%) • Neutral Cleaner • Hydrochloric Acid (10%) • Ethyl Alcohol (50%) • Formalin (36%) • Milk • Coffee • Tea • Wine • Vinegar • Ketchup • Oleic Acid/Vegetable oil 	

The above data are representative values and are not guaranteed.

Product Use

The user is solely responsible for evaluating and determining whether these 3M Products are suitable and appropriate for any particular use or manufacturing process in which they may be used.

Consider These Factors in Determining the Suitability of the Product

- For interior use only.
- Recommended for application to smooth glass surfaces only.

NOTE: Application to smooth application surfaces, such as acrylic, may be possible. However, plastic materials may outgas, causing the film to bubble or peel. Outgassing is the release of a gas as certain plastics or coated surfaces dry and cure. This occurs over a period of time, but not indefinitely. Product that is applied to a surface that is still outgassing will develop air bubbles in the Product that may appear some time after the installation. 3M assumes no liability for bubbles that appear in the applied Product due to outgassing.

- Recommended for flat or slightly curved surfaces only.
- Product is not intended for electronic cutting.
- The Product has an erasable surface layer that makes it unsuitable for printing.

Application and Removal Guidelines

The values in these tables are typical, and are based on test data deemed reliable but are not warranted.

Characteristic	Value
Application Surface Type	Glass
Application Location	Interior
Application Temperature	60 °F - 100 °F (10 °C - 38 °C) air and application surface
Application Method	Wet application
High Humidity Environments	Products are not recommended for Interior Applications where condensation consistently occurs.
Product Removal	Low heat, 3M™ Citrus Base Cleaner or 3M™ Adhesive Remover Citrus Base and scraper

Installation Considerations

Use wet application technique as described in the 3M™ FASARA™ Glass Finishes Installation Guide. In addition, please consider the following:

- Always handle the Product with care.
- The Product edges may be sharp; use caution when handling.
- Avoid scratching or denting the surface during installation as this may affect writing performance.
- Before setting the adhesive to the application surface:
 - Ensure proper alignment by using a guideline. Allow additional material for trimming as necessary.
 - Ensure that the entire surface of the film is flat against the application surface and the ends of the film do not sag.
- Stretching or attempting to reposition the Product during application may deform, buckle, or ripple the Product.
- Wrinkles created during application cannot be removed with heat due to polyester construction.
- Seams tend to accumulate ink from the markers. Make seams as tight as possible.

Removing the Product

Removing the Product too quickly can result in excessive adhesive left on the application surface. If necessary, heat a small section of the Product with a heat gun to soften the adhesive, peel back slowly, then heat and remove the next section.

If any adhesive remains on the application surface, it can be easily cleaned with a product such as 3M™ Citrus Base Cleaner or 3M™ Adhesive Remover Citrus Base.

Using the Product as Whiteboard

- Most standard dry erase markers for whiteboard are suitable for writing on the Product.
- To minimize ghosting, erase writing as soon as possible using an eraser designed for whiteboards, soft paper towels, whiteboard cleaning spray, water, or whiteboard cleaning wipes.

NOTE: DO NOT use non-whiteboard cleaning wipes.

- To prevent ink debris from sticking to the Product, use soft paper towels with whiteboard cleaning spray or water as needed to pick up the ink debris. Change to a new eraser or use new whiteboard cleaning wipes often.
- NEVER use permanent markers or felt pens. Only use select dry erase markers for writing on the Product.
- If a non-specified marker is accidentally used, write over the non-specified mark with a dry erase marker, then wipe it off immediately using the maintenance method below.

NOTE: Upon initial use, the dry erase marker ink may not adhere well to the Product surface. Writing with a dry erase marker and erasing several times will "break-in" the surface.

Maintenance

- Erase content from the Product as soon as it is no longer needed.
- To remove ink buildup and debris from the whiteboard surface, use water and soft paper towels as needed. For more effective cleaning, add a few drops of mild detergent, such as baby shampoo, to the water.

Shelf Life and Storage

Shelf Life

Apply the Product within 1 year of the date of purchase. The storage conditions specified in this document must be maintained for full shelf life.

Storage Conditions

- 40 °F - 90 °F (4 °C - 32 °C)
- Away from direct sunlight and high humidity
- Clean, dry area
- Original container with end caps, in the plastic sleeve, stored horizontally, a maximum of 6 cartons high
- Bring the Product to room temperature before application

Health and Safety



CAUTION

When handling any chemical products, read the manufacturers' container labels and the Safety Data Sheets (SDS) for important health, safety and environmental information. To obtain SDS sheets for 3M products go to 3M.com/SDS, or by mail or in case of an emergency, call 1-800-364-3577 or 1-651-737-6501.

When using any equipment, always follow the manufacturers' instructions for safe operation.



WARNING: Risk of Glass Breakage Due to Thermal Expansion

Glass surfaces exposed to sunlight will absorb heat. A glass surface covered by a film with high opacity or dark-colored ink, including films with small areas of high opacity or dark-colored ink, will absorb more heat. Heat absorption can create thermal stress that results in glass breakage, or thermal cracking. This can cause personal injury and property damage. 3M specifically does not recommend using a film with high opacity or dark-colored ink on glass surfaces with significant exposure to sunlight.

Technical Information

Technical information and data, recommendations, and other statements provided by 3M are based on information, tests, or experience which 3M believes to be reliable, but the accuracy or completeness of such information is not guaranteed. Such technical information and data are intended for persons with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. The typical values shown should not be used for the purpose of specification limits. If you have questions about this Product, contact the Technical Service helpline at 1-888-650-3497.

For more information or to order samples, please visit www.3M.com/Whiteboard.

Change History

Rev D (15-SEPT-2015):

- Removed alcohol cleaning procedures and references
- Updated Warranty language, adding “3M Basic Product Warranty” and other changes

Rev C (23-JUN-2015):

- Removed alcohol cleaning procedures and references
- Updated Warranty language, adding “3M Basic Product Warranty” and other changes
- Added revision and doc type to footers, and other formatting changes.

WARRANTY

Product

3M FASARA Whiteboard Film WH-111-G (the "Product").

3M Basic Product Warranty

The Product(s) specified in this document are warranted to be free of defects in materials and manufacture ("3M Basic Product Warranty") at the time of shipment ("Warranty Period") by 3M or its authorized distributor.

Limited Warranty

1. For the Product(s) specified in this document, 3M makes the 3M Basic Product Warranty only.
2. For a buyer's convenience, 3M may provide engineering or technical information, recommendations, installation instructions or guides, and other information or materials relating to a Product ("Other Product Information"), but 3M makes only the 3M Basic Product Warranty and does not warrant any Other Product Information.
3. 3M has no obligation under the 3M Basic Product Warranty as to Product that has been: (a) modified, altered or processed in any manner; (b) stored, applied, installed, or used in a manner other than that 3M recommends in this document and in all Other Product Information; (c) damaged through contact with a person or thing, misuse, accident, neglect, or other action by anyone other than 3M; (d) improperly installed, including, without limitation, installation after the expiration the Product's shelf life or installation without proper surface preparation, or (e) exposed to excessive heat, humidity, dirt or UV light.
4. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, THE 3M BASIC PRODUCT WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, RIGHTS OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE AND THOSE ARISING FROM A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. THE BUYER IS RESPONSIBLE FOR DETERMINING IF A PRODUCT IS SUITABLE FOR ITS PARTICULAR PURPOSE AND APPLICATION METHODS.

5. 3M must receive any 3M Basic Product Warranty claim in writing no later than 10 business days after (a) the end of the Warranty Period or (b) the discovery of the 3M Warranty claim, whichever is earlier.

Limited Remedy

IF ANY PRODUCT IS PROVEN NOT TO HAVE MET THE 3M BASIC PRODUCT WARRANTY DURING THE WARRANTY PERIOD, THEN THE BUYER'S EXCLUSIVE REMEDY, AND 3M'S SOLE OBLIGATION, WILL BE, AT 3M'S OPTION, TO REPLACE THE NONCONFORMING PRODUCT OR TO REFUND THE NONCONFORMING PRODUCT'S PURCHASE PRICE.

Limitation of Liability

3M WILL NOT UNDER ANY CIRCUMSTANCES BE LIABLE TO A BUYER FOR DIRECT (other than the Limited Remedy stated above), SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES (INCLUDING, WITHOUT LIMITATION, LOSS OF PROFITS) IN ANY WAY RELATED TO THE PRODUCT, THIS DOCUMENT OR OTHER PRODUCT INFORMATION, REGARDLESS OF THE LEGAL OR EQUITABLE THEORY ON WHICH SUCH DAMAGES ARE SOUGHT.

3M Commercial Solutions 3M U.S.

3M Center
Building 220-12E-04
St. Paul, MN 55144-1000
1-888-650-3497
3M.com/AMD

3M Canada

1840 Oxford St E
London, ON N5V 3R6
1-800-265-1840

3M Commercial Solutions 3M Europe

Hermeslaan 7
1831 Diegem
Belgium
www.3M.eu/ArchitecturalMarkets

3M Commercial Solutions 3M Italia, S.p.A.

Via Norberto Bobbio, 21
20096 Pioletto MI
Tel. 02.7035.2517
3mitalia.it

3M India Limited Commercial Solutions

Concorde Blook, UB City
24 Vittal Mallya Road, Bangalore 560 001
Tel: 080 2223 1414 | Fax: 080 2223 1450
3minteriors.in@mmm.com
www.3M.com/in/interiors

3M Commercial Solutions 3M Gulf

PO Box 20191, Dubai Internet City
Building @ 11
Dubai, United Arab Emirates
Tel. 971 4 3670 777 | Fax 971 4 3670 998

